
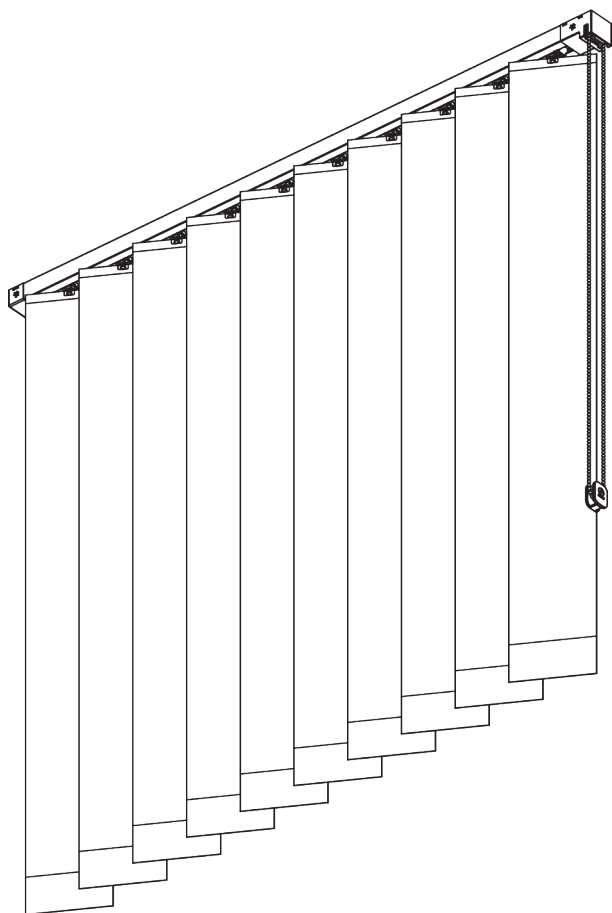


SG 2910



PRODUCT INFORMATION

- **Operation:** chain
- **Range:** S - L
- **Fitting:** ceiling, wall, recess
- **Colours:** white RAL 9016, black RAL 9005, anodised aluminum; special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection

Features:

- Optimised light control
- Mono controlled
- Louvre width: 127 mm
- Vertical Waves

SYSTEM SPECIFICATIONS


A. SYSTEM DIMENSIONS



5 m



Single stack: 90 cm
Pair stack: 1.2 m



4 m



320 g per louvre


Stack sizes

		100	150	200	250	300	350	400	450	500
127 mm		30	37	44	51	58	65	72	79	86
		23	27	30	34	37	41	44	48	51


(cm)

B. PROFILE

Profile information




SG 11863
Profile

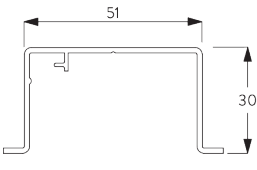


SG 11866
Recess profile

C. HOW TO MEASURE

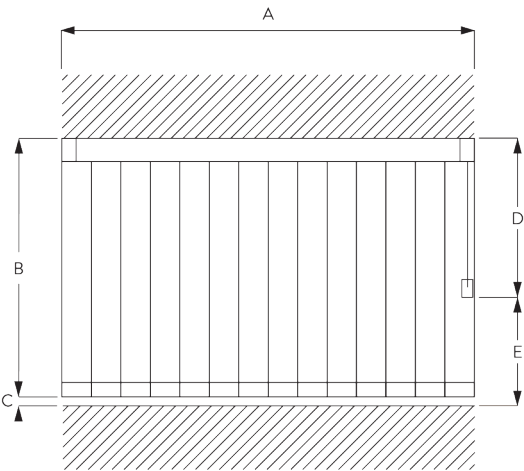

- A: System width
- B: System height
- C: Distance between floor and fabric
- D: Chain height
- E: Safety retainer SG 10731 min. 150 cm above floor

Light gap



D. SPECIFICATION
TEXT


Silent Gliss SG 2910 Chain Operated Vertical Blind System. Supplied made to measure comprising aluminium profile SG 11863 [powder coated white / powder coated black / silver anodised], mono control stainless steel chain SG 4845, 127mm louvre rotation elements SG 11793. Fitted [top fix with clamp SG 3033 / SG 3034] / [face fix with smart fix brackets SG 11202 - SG 11204 and clamp SG 3004] / [face fix with square smart fix brackets SG 11212 – SG 11214 and clamp SG 3004 / face fix with universal smart fix brackets SG 11154 – SG 11156 and clamp SG 3004 / recess fix with profile SG 11866, wedge SG 5118, recess mask SG 11886]. Fabric supplied from Silent Gliss fabric range.

FITTING

A. FITTING
INFORMATION


For detailed fitting information, visit the Silent Gliss website.

Fixing points




B. CEILING FITTING


Clamp SG 3033 / SG 3044

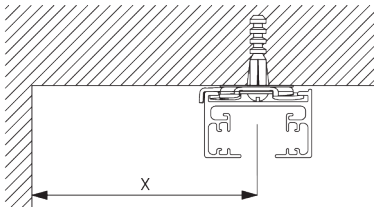

Min. wall distance louvres	X mm
127 mm	85
Vertical Waves 125 mm	140




SG 3033
Clamp




SG 3044
Clamp

C. WALL FITTING


Smart Fix



Smart Fix SG 11202 - SG 11204 and clamp SG 3044:
Screw SG 10395 (M4x6) needed




Square Smart Fix SG 11212 - SG 11214 and clamp SG 3044:
Screw SG 10395 (M4x6) needed

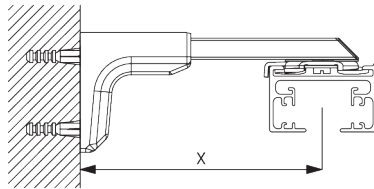

Universal Smart Fix SG 11154 - SG 11156 and clamp SG 3044:
Screw SG 10492 (M4x8) needed

Min. wall distance standard louveres	X mm
SG 11202 / SG 11212	92
SG 11203 / SG 11213	112
SG 11204 / SG 11214	142
SG 11154	110-130
SG 11155	132-160
SG 11156	182-210

Min. wall distance Vertical Waves	X mm
SG 11204 / SG 11214	142
SG 11155	140-160
SG 11156	182-210




SG 3044
Clamp




SG 10395
Pan head screw M4x6




SG 10492
Pan head screw M4x8




SG 11202
Smart Fix 100 mm




SG 11203
Smart Fix 120 mm




SG 11204
Smart Fix 150 mm




SG 11212
Square Smart Fix 100 mm




SG 11213
Square Smart Fix 120 mm




SG 11214
Square Smart Fix 150 mm



SG 11154
Universal Smart Fix 120 mm




SG 11155
Universal Smart Fix 150 mm




SG 11156
Universal Smart Fix 200 mm

D. RECESS FITTING


Recess profile
SG 11866




Min. wall distance louveres	X mm
127 mm	85
Vertical Waves 125 mm	140

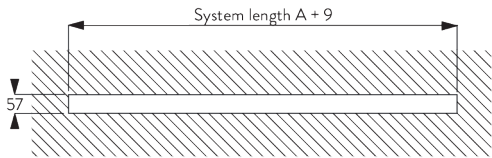


Recess depth: 29 mm



SG 5118
Wedge




SG 11866
Recess profile





SG 11886
Recess mask

SYSTEM OPTIONS

A. VERTICAL WAVES

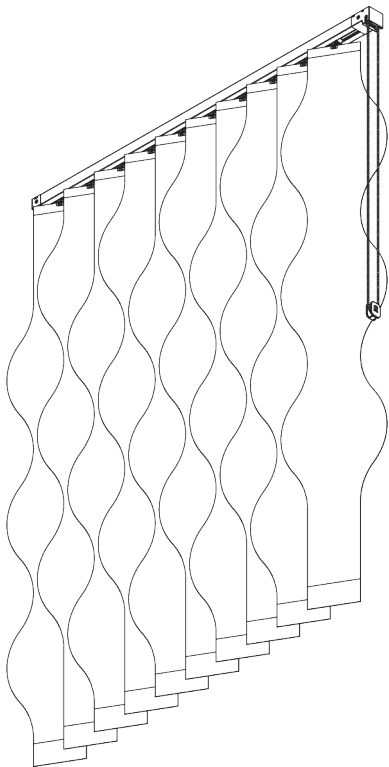


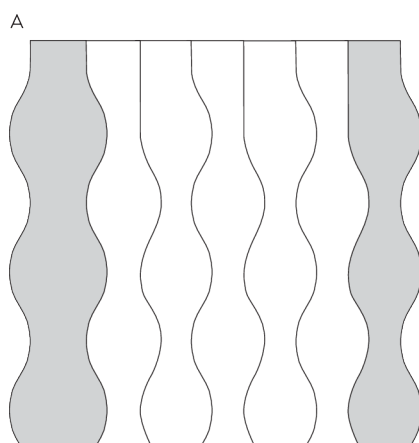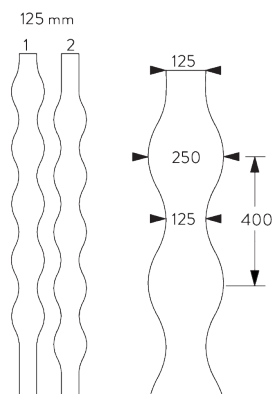


Wall ending

A: Wavy edge

B: Straight edge

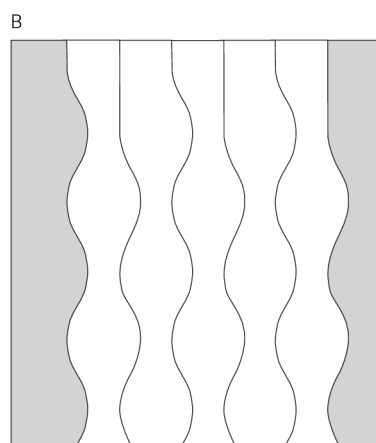

B. STACKING VARIATIONS



A: Single stack in one direction

B: Pair stack in two directions symmetrical










C: Pair stack in one direction asymmetrical



D: Pair stack in two directions asymmetrical

E: Multiple stacking in one direction symmetrical or asymmetrical













PARTS


A. STANDARD PARTS

	SG 3033 Clamp
	SG 4845 Bead chain metal ø 4.5 mm
	SG 10731 Child safety retainer set
	SG 11790 Pilot runner
	SG 11793 Rotation element set 127 mm
	SG 11805 Chain drive
	SG 11813 Belt return
	SG 11837 Belt connector
	SG 11838 Belt connector
	SG 11844 Driving belt
	SG 11845 Top clip 127 mm
	SG 11849 Bottom weight 127 mm
	SG 11854 End stop
	SG 11856 End stop

	SG 11863 Profile
	SG 11871 Lock


B. OPTIONAL PARTS

	SG 2962 Connection bridge
	SG 3044 Clamp
	SG 5118 Wedge
	SG 11154 Universal Smart Fix 120 mm
	SG 11155 Universal Smart Fix 150 mm
	SG 11156 Universal Smart Fix 200 mm
	SG 11202 Smart Fix 100 mm
	SG 11203 Smart Fix 120 mm
	SG 11204 Smart Fix 150 mm
	SG 11212 Square Smart Fix 100 mm
	SG 11213 Square Smart Fix 120 mm
	SG 11214 Square Smart Fix 150 mm
	SG 11794 Rotation element set 100 mm
	SG 11847 Bottom weight 127 mm




SG 11851

Bottom link 127 mm




SG 11852

Plate



SG 11866

Recess profile



SG 11886

Recess mask
