


VERTICAL BLIND SYSTEMS

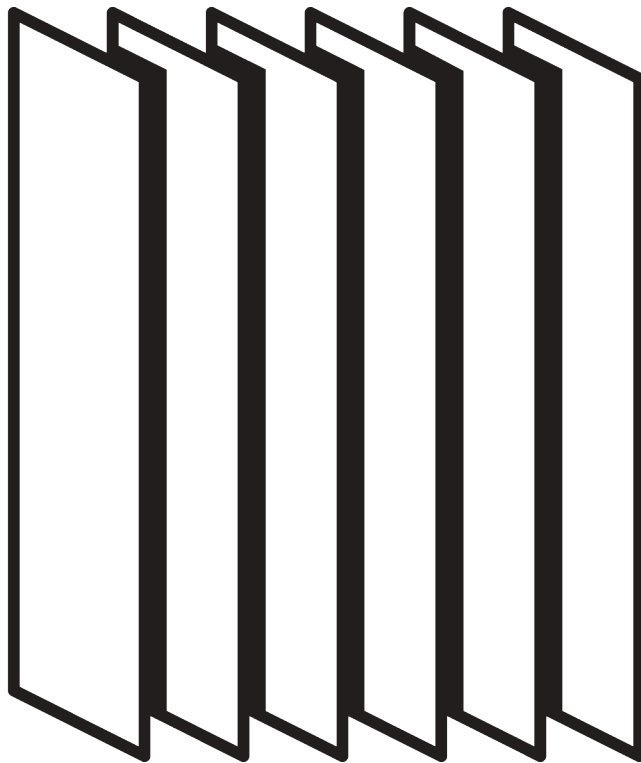

GENERAL NOTES

Dimensions

- Measurements are in mm except where indicated.
- Max. kg relates to fabric incl. accessories (bottom bars, etc.).
- Recommended distance floor / fabric: 20 mm.
- In order to determine system height (B), the smallest room height must be taken into account.

Fitting

- Installation by qualified fitter only.
- Number of brackets and fitting positions / fixing points vary depending on fitting surface, system weight, fabric make-up, screw / fixing type and obstacles.
- Qualified fitter must use appropriate screws / fixings for each situation.
- Profile lip if applicable to be installed to room side.
- Electrical installations must be carried out according to Silent Gliss wiring diagrams and conform to local regulations.
- Check space for cables and plugs!



Child Safety

- All relevant Silent Gliss systems correspond to child safety EN 13120.
- All parties involved must comply with EN 13120.

APPLICATION CHART

PAGE	SYSTEM	OPERATION	DIMENSION	← max. →	↑ max. ↓	kg _{max.}
5	SG 2910		S - L	5 m	4 m	0.4 kg
13	SG 2960		S - L	5 m	4 m	0.4 kg

SG 2910

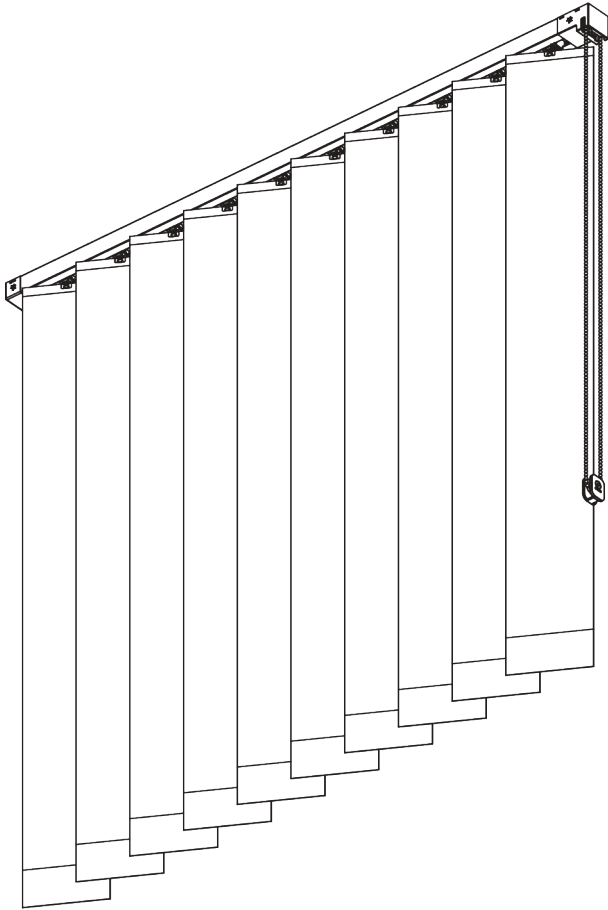

PRODUCT INFORMATION


- **Operation:** chain
- **Range:** S - L
- **Fitting:** ceiling, wall, recess
- **Colours:** white RAL 9016, black RAL 9005, anodised aluminum; special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection

Features:

- Optimised light control
- Mono controlled
- Louvre width: 127 mm
- Vertical Waves

SYSTEM SPECIFICATIONS


A. SYSTEM DIMENSIONS



5 m



Single stack: 90 cm
Pair stack: 1.2 m



4 m




320 g per louvre

Stack sizes


		100	150	200	250	300	350	400	450	500	
127 mm		30 23	37 27	44 30	51 34	58 37	65 41	72 44	79 48	86 51	(cm)

B. PROFILE

Profile information




SG 11863
Profile




SG 11866
Recess profile

C. HOW TO MEASURE

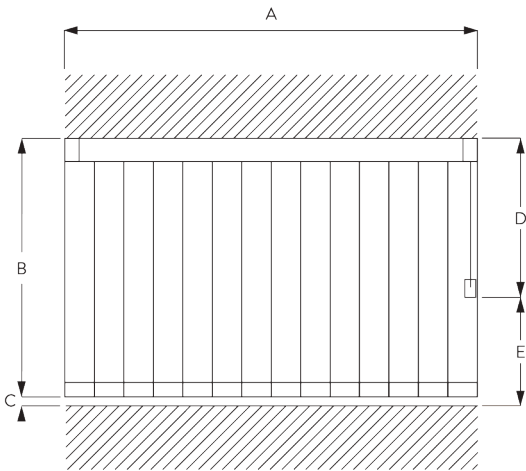

- A: System width
- B: System height
- C: Distance between floor and fabric
- D: Chain height
- E: Safety retainer SG 10731 min. 150 cm above floor

Light gap



D. SPECIFICATION
TEXT


Silent Gliss SG 2910 Chain Operated Vertical Blind System. Supplied made to measure comprising aluminium profile SG 11863 [powder coated white / powder coated black / silver anodised], mono control stainless steel chain SG 4845, 127mm louvre rotation elements SG 11793. Fitted [top fix with clamp SG 3033 / SG 3034] / [face fix with smart fix brackets SG 11202 - SG 11204 and clamp SG 3004] / [face fix with square smart fix brackets SG 11212 - SG 11214 and clamp SG 3004 / face fix with universal smart fix brackets SG 11154 - SG 11156 and clamp SG 3004 / recess fix with profile SG 11866, wedge SG 5118, recess mask SG 11886]. Fabric supplied from Silent Gliss fabric range.

FITTING

A. FITTING
INFORMATION


For detailed fitting information, visit the Silent Gliss website.

Fixing points




B. CEILING FITTING


Clamp SG 3033 / SG 3044

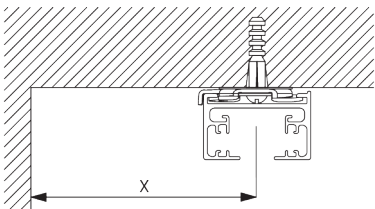

Min. wall distance louvres	X mm
127 mm	85
Vertical Waves 125 mm	140




SG 3033
Clamp




SG 3044
Clamp

C. WALL FITTING


Smart Fix



Smart Fix SG 11202 - SG 11204 and clamp SG 3044:
Screw SG 10395 (M4x6) needed




Square Smart Fix SG 11212 - SG 11214 and clamp SG 3044:
Screw SG 10395 (M4x6) needed

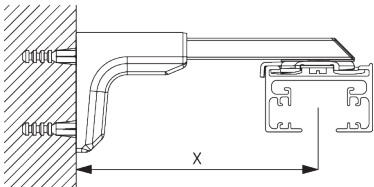

Universal Smart Fix SG 11154 - SG 11156 and clamp SG 3044:
Screw SG 10492 (M4x8) needed

Min. wall distance standard louveres	X mm
SG 11202 / SG 11212	92
SG 11203 / SG 11213	112
SG 11204 / SG 11214	142
SG 11154	110-130
SG 11155	132-160
SG 11156	182-210

Min. wall distance Vertical Waves	X mm
SG 11204 / SG 11214	142
SG 11155	140-160
SG 11156	182-210




SG 3044
Clamp




SG 10395
Pan head screw M4x6




SG 10492
Pan head screw M4x8




SG 11202
Smart Fix 100 mm




SG 11203
Smart Fix 120 mm




SG 11204
Smart Fix 150 mm




SG 11212
Square Smart Fix 100 mm




SG 11213
Square Smart Fix 120 mm




SG 11214
Square Smart Fix 150 mm



SG 11154
Universal Smart Fix 120 mm




SG 11155
Universal Smart Fix 150 mm




SG 11156
Universal Smart Fix 200 mm

D. RECESS FITTING


Recess profile
SG 11866




Min. wall distance louveres	X mm
127 mm	85
Vertical Waves 125 mm	140

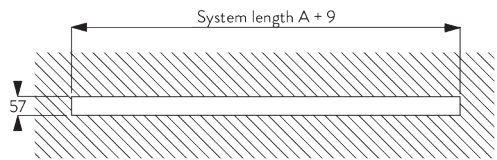


Recess depth: 29 mm



SG 5118
Wedge




SG 11866
Recess profile






SG 11886
Recess mask

SYSTEM OPTIONS

A. VERTICAL WAVES

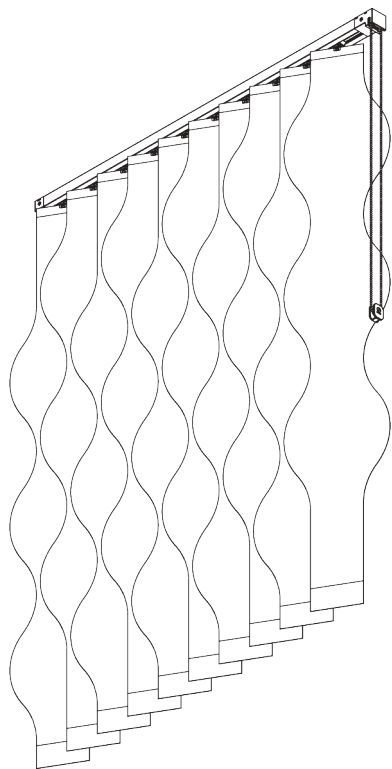

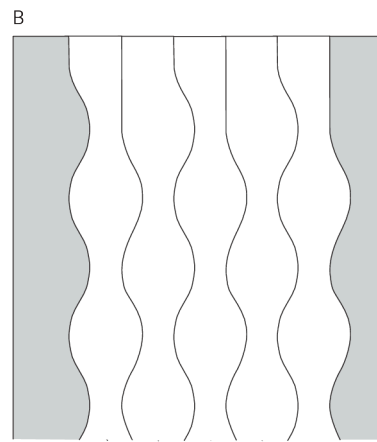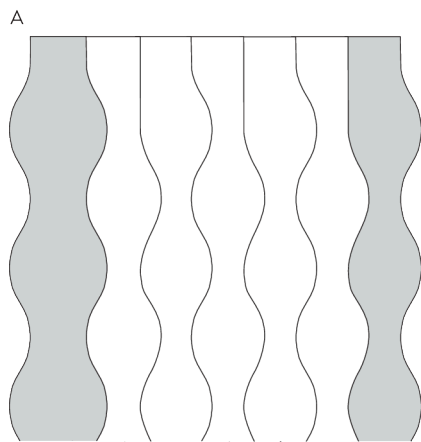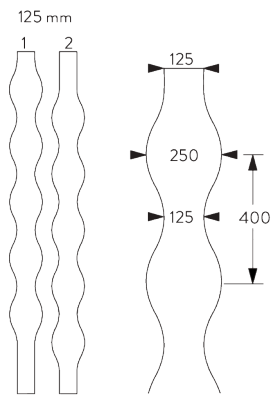


Wall ending

A: Wavy edge

B: Straight edge

B. STACKING VARIATIONS



A: Single stack in one direction

B: Pair stack in two directions symmetrical










C: Pair stack in one direction asymmetrical



D: Pair stack in two directions asymmetrical

E: Multiple stacking in one direction symmetrical or asymmetrical













PARTS


A. STANDARD PARTS

	SG 3033 Clamp
	SG 4845 Bead chain metal ø 4.5 mm
	SG 10731 Child safety retainer set
	SG 11790 Pilot runner
	SG 11793 Rotation element set 127 mm
	SG 11805 Chain drive
	SG 11813 Belt return
	SG 11837 Belt connector
	SG 11838 Belt connector
	SG 11844 Driving belt
	SG 11845 Top clip 127 mm
	SG 11849 Bottom weight 127 mm
	SG 11854 End stop
	SG 11856 End stop

	SG 11863 Profile
	SG 11871 Lock


B. OPTIONAL PARTS

	SG 2962 Connection bridge
	SG 3044 Clamp
	SG 5118 Wedge
	SG 11154 Universal Smart Fix 120 mm
	SG 11155 Universal Smart Fix 150 mm
	SG 11156 Universal Smart Fix 200 mm
	SG 11202 Smart Fix 100 mm
	SG 11203 Smart Fix 120 mm
	SG 11204 Smart Fix 150 mm
	SG 11212 Square Smart Fix 100 mm
	SG 11213 Square Smart Fix 120 mm
	SG 11214 Square Smart Fix 150 mm
	SG 11794 Rotation element set 100 mm
	SG 11847 Bottom weight 127 mm




SG 11851

Bottom link 127 mm




SG 11852

Plate



SG 11866



Recess profile



SG 11886

Recess mask

SG 2960

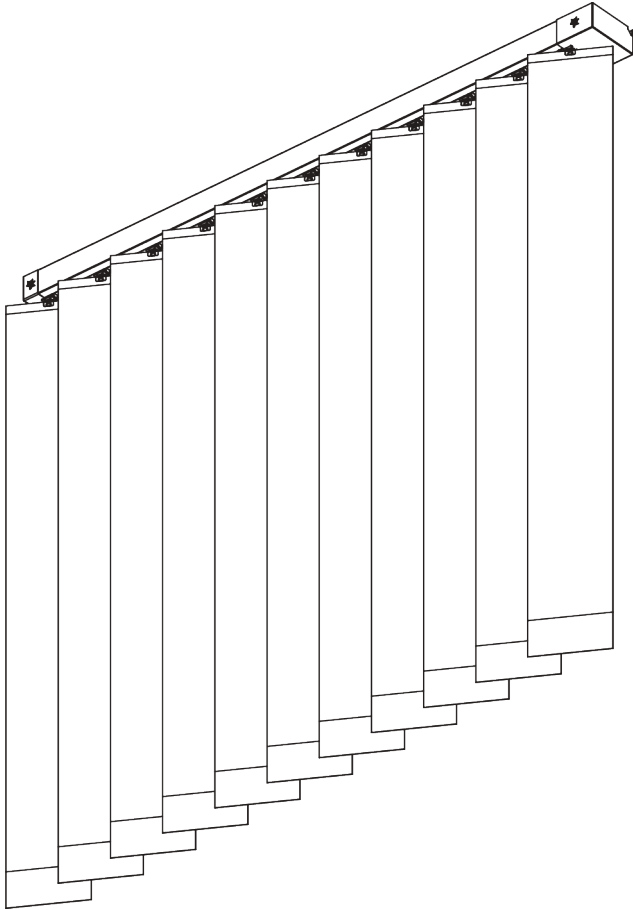

PRODUCT INFORMATION


- **Operation:** motorised
- **Range:** S - L
- **Fitting:** ceiling, wall, recess
- **Colours:** white RAL 9016, black RAL 9005, anodised aluminum; special colours possible
- **Fabrics:** refer to Silent Gliss fabric collection

Features:

- Optimised light control
- Various control options
- Louvre width: 127 mm
- Vertical Waves

SYSTEM SPECIFICATIONS


A. SYSTEM DIMENSIONS



5 m



Single stack: 90 cm
Pair stack: 1.2 m



4 m



320 g per louvre


Stack sizes

		100	150	200	250	300	350	400	450	500
127 mm		28 21	35 25	42 28	49 32	56 35	63 39	70 42	77 46	84 49

(cm)

B. PROFILE


Profile information

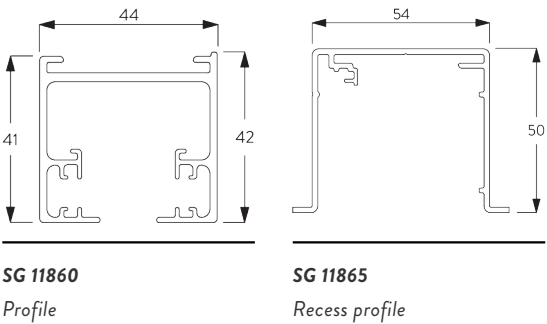

SG 11860
Profile


SG 11865
Recess profile

C. HOW TO MEASURE

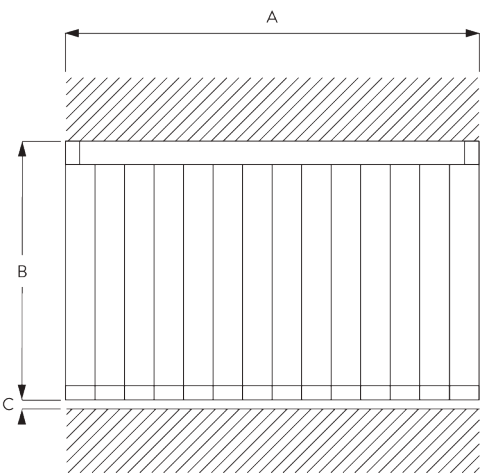

A: System width
B: System height
C: Distance between floor and fabric

Light gap



D. SPECIFICATION
TEXT


Silent Gliss SG 2960 Motorised Vertical Blind System. Supplied made to measure comprising aluminium profile SG 11863 [powder coated white / powder coated black / silver anodised], motor [40 series SG 11949 / 50 series SG 11251], SG, 127mm louvre rotation elements SG SG 11793. Fitted [top fix with clamp SG 3033 / SG 3034] / [face fix with smart fix brackets SG 11202 - SG 11204 and clamp SG 3004] / [face fix with square smart fix brackets SG 11212 - SG 11214 and clamp SG 3004 / face fix with universal smart fix brackets SG 11154 - SG 11156 and clamp SG 3004 / recess fix with profile SG 11866, wedge SG 5118, recess mask SG 11886]. Controlled by [fixed switch / third party control system / SG Control R with external receiver / SG Control N / Smart by Silent Gliss]. All control components supplied at additional cost. All wiring to be strictly in accordance with Silent Gliss wiring diagrams. Fabric supplied from Silent Gliss fabric range.

FITTING

A. FITTING
INFORMATION


For detailed fitting information, visit the [Silent Gliss website](#).

Fixing points

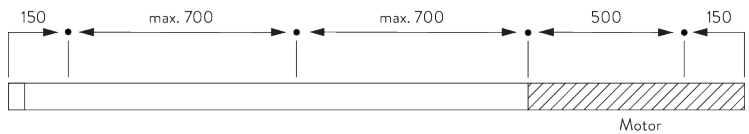


B. CEILING FITTING


Clamp SG 3033 /
SG 3044

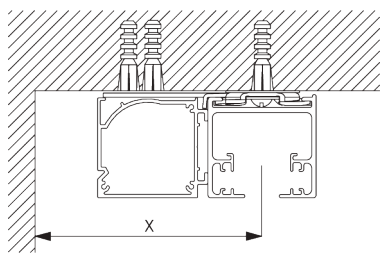

Min. wall distance louvres	X mm
127 mm	85
Vertical Waves 125 mm	140




SG 3033
Clamp



SG 3044
Clamp


C. WALL FITTING

Smart Fix

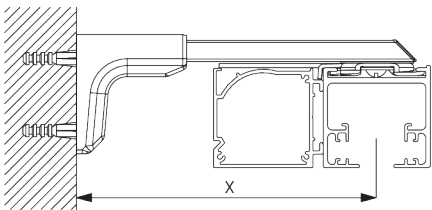


Universal Smart Fix SG 11155 - SG 11156
and clamp SG 3044:
Screw SG 11158 (M4x12) needed.


Smart Fix	X mm
SG 11155	132-160
SG 11156	182-210
Vertical Waves	
SG 11155	140-160
SG 11156	182-210



SG 3044
Clamp



SG 11155
Universal Smart Fix 150 mm




SG 11156
Universal Smart Fix 200 mm




SG 11158
Countersunk head screw
M4x12

D. RECESS FITTING


Recess Profile
SG 11865

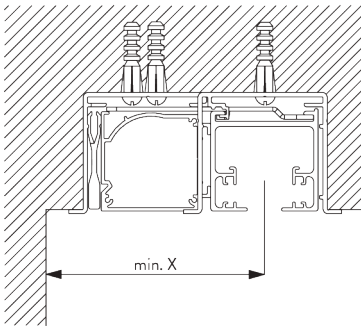


Min. wall distance louveres	X mm
127 mm	85
Vertical Waves 125 mm	140

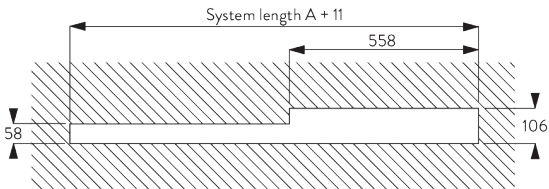


Recess depth: 49 mm




SG 11865
Recess profile




SG 11843
Recess box left




SG 11846
Recess box right



SG 11885
Recess mask





SG 11887
Cover




SG 11795
Wedge


Recess Profile SG 11865 - suspended ceiling

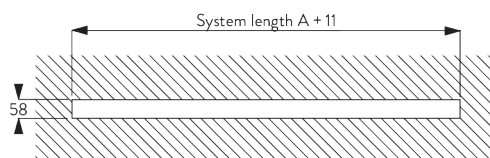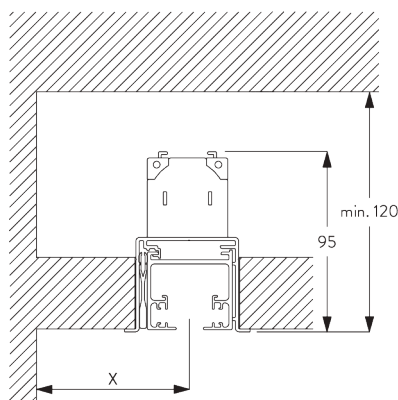


Min. wall distance louveres	X mm
127 mm	85
Vertical Waves 125 mm	140



SG 11865
Recess profile





SG 11897
Recess mask




SG 11795
Wedge

SYSTEM OPTIONS

A. VERTICAL WAVES

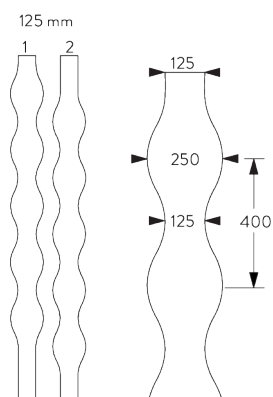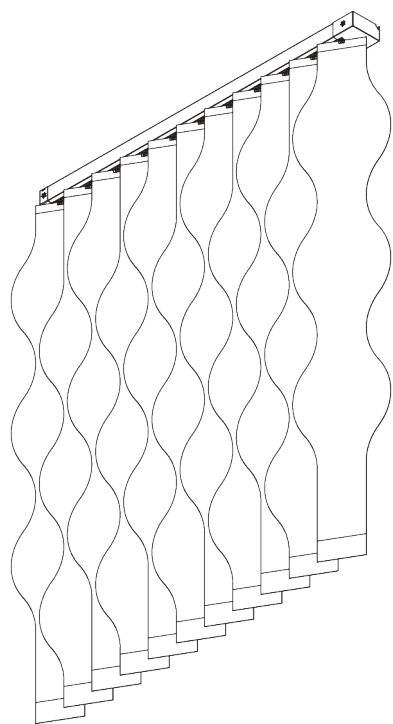

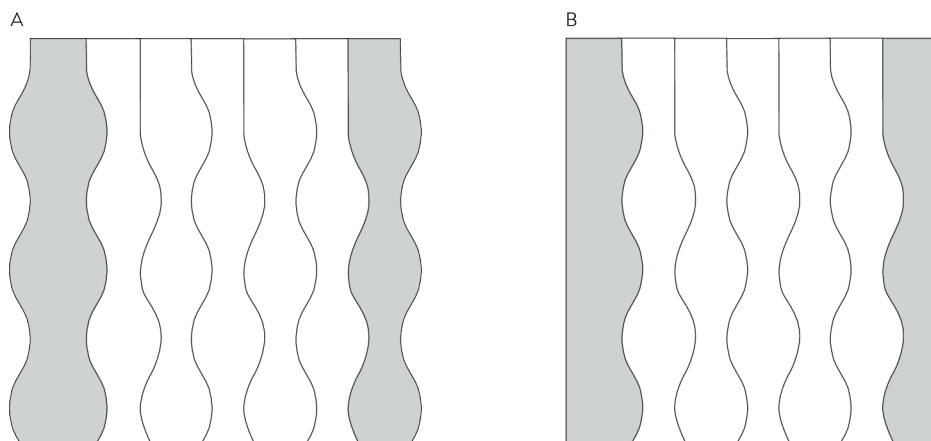


Wall ending

A: Wavy edge

B: Straight edge

B. STACKING VARIATIONS

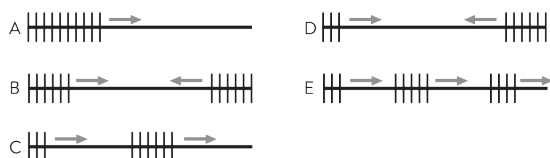

A: Single stack in one direction

B: Pair stack in two directions symmetrical

C: Pair stack in one direction asymmetrical

D: Pair stack in two directions asymmetrical

E: Multiple stacking in one direction symmetrical or asymmetrical

MOTORS & CONTROLS

A. MOTOR FEATURES

Motors	50-Series	40-Series
	SG 11251 (SG 11892 / SG 11893, SG 11896)	SG 11949 (SG 11890 / SG 11891, SG 11895)
Motor Features		
Soft start	●	●
Precision controlled slat adjustment		●
Electronic end-stop	●	●
Electronic revolution counter (unlimited revolution)	●	●
Parallel wiring possible without additional relays		●
Disconnectable motor cable	●	●
IP class	IP 30	IP 30
Control Features		
Dry contact control	●	●
Dry contact and / or SG Control N control		●
SG Control N (built-in receiver)		●
SG Control R (external receiver required)		●
Smart by Silent Gliss	●	
Suitable for most major home automation systems (with suitable interface)		●

B. MOTOR SPECIFICATIONS

Motors	Max. weight	Min. system width	Voltage	Current	Frequency	Speed	Frequency receiver
50-Series (Smart by Silent Gliss)							
SG 11251	320 g per louvre	90 cm	24 V DC	1.5 A	n/a	32 rpm	n/a
40-Series							
SG 11949 (standard)	320 g per louvre	90 cm	24 V DC	1.5 A	n/a	32 rpm	433 MHz

C. OPERATING METHODS


See catalogue "controls" for details.

Wall Switch



System can be operated by fixed wall switch.

SG Control N



Various radio hand-held and wall transmitters available.



Silent Gliss Move App.

SG Control R



Various radio hand-held and wall transmitters available.
An external receiver is required.

Smart by Silent Gliss



Open designed two-way communication system which allows to flawlessly integrate products with most major building management systems.












D. WIRING DIAGRAMS







Refer to Silent Gliss website.












PARTS






















A. STANDARD PARTS

	SG 3033 Clamp
	SG 6781 Pan head screw M5x5
	SG 11790 Pilot runner
	SG 11793 Rotation element set 127 mm
	SG 11826 Belt return
	SG 11837 Belt connector
	SG 11838 Belt connector
	SG 11841 Cover
	SG 11842 Bracket
	SG 11844 Driving belt
	SG 11845 Top clip 127 mm
	SG 11849 Bottom weight 127 mm
	SG 11854 End stop
	SG 11856 End stop

	SG 11860 Profile
	SG 11862 Motor drive set right
	SG 11871 Lock
	SG 11883 Cover right
	SG 11891 Motor set 24V DC right, Vertical 40-Series S 3/32, radio receiver

B. OPTIONAL PARTS

	SG 2962 Connection bridge
	SG 3044 Clamp
	SG 10275 Locking nut M4 DIN 985
	SG 10277 Pan head screw M4x12
	SG 11155 Universal Smart Fix 150 mm
	SG 11156 Universal Smart Fix 200 mm
	SG 11260 Gateway Cedia
	SG 11261 Gateway KNX
	SG 11262 Expansion unit
	SG 11263 Power supply 24V DC, 2.5A DIN Rail
	SG 11264 Power supply 24V DC, 3.8A DIN Rail
	SG 11265 Power supply 24V DC, 5A DIN Rail
	SG 11266 Power supply 24V DC, 10A DIN Rail
	SG 11281 Cabinet for 8 systems

	SG 11282 Cabinet for 24 systems		SG 11888 Cover left		SG 11967 Power supply set 24V/2A with US plug
	SG 11283 Cabinet for 56 systems		SG 11889 Cover right		SG 20336 Hand held transmitter 8 channel
	SG 11319 Plug 4-pin, MC 1.5/4-ST-3.81		SG 11890 Motor set 24V DC left, Vertical 40-Series S 3/32, radio receiver		SG 20907 Control module motor type R
	SG 11794 Rotation element set 100 mm		SG 11892 Motor set 24V DC left, 50-Series S 3/32		SG 20913 Wall switch single channel
	SG 11795 Wedge		SG 11893 Motor set 24V DC right, 50-Series S 3/32		SG 20914 Wall switch 8 channel
	SG 11843 Recess box left		SG 11895 Motor set 24V DC top mounted, Vertical 40-Series S 3/32, radio receiver		SG 20917 Pattress box
	SG 11846 Recess box right		SG 11896 Motor set 24V DC top mounted, 50-Series S3/32		SG 20918 Control module motor type A,AA
	SG 11847 Bottom weight 127 mm		SG 11897 Recess mask		SG 20919 Control module motor type R
	SG 11851 Bottom link 127 mm		SG 11900 Move Server		
	SG 11861 Motor drive set left		SG 11931 Radio hand held 1 channel		
	SG 11865 Recess profile		SG 11932 Radio hand held 6 channel		
	SG 11882 Cover left		SG 11936 Radio wall transmitter 1 channel		
	SG 11885 Recess mask		SG 11937 Radio wall transmitter 6 channel		
	SG 11887 Cover		SG 11966 Power supply set 24V/2A with GB plug		

The Architects of Silence

Silent Gliss is the leading global supplier of premium interior window treatments. Since 1952 we have been tirelessly committed to the development of the world's smoothest, quietest systems using state of the art technology.

Driven by customer needs, Silent Gliss offers functional and durable products. Expert technical advice coupled with installation and support services complete the offer. Silent Gliss stands for innovative, sustainable, tailor made solutions, exceptional design and first-class quality.

Silent Gliss Ltd.

Pyramid Business Park
Poorhole Lane, Broadstairs
Kent CT10 2PT
United Kingdom
T +44 1843 863571
F +44 1843 864503
info@silentgliss.co.uk

Silent Gliss Global Ltd.

Pyramid Business Park
Poorhole Lane, Broadstairs
Kent CT10 2PT
United Kingdom
T +44 1843 874250
F +44 1843 864503
info@silentglissglobal.com

Silent Gliss Blinds Trading LLC

Office 1906
The H Hotel Complex
Trade Center First
Dubai
United Arab Emirates
T +971 4 7050318
info@silentgliss.ae

silentgliss.co.uk
silentglissglobal.com
silentgliss.ae